


Motorola S-Card: Checking pairing and copy protection

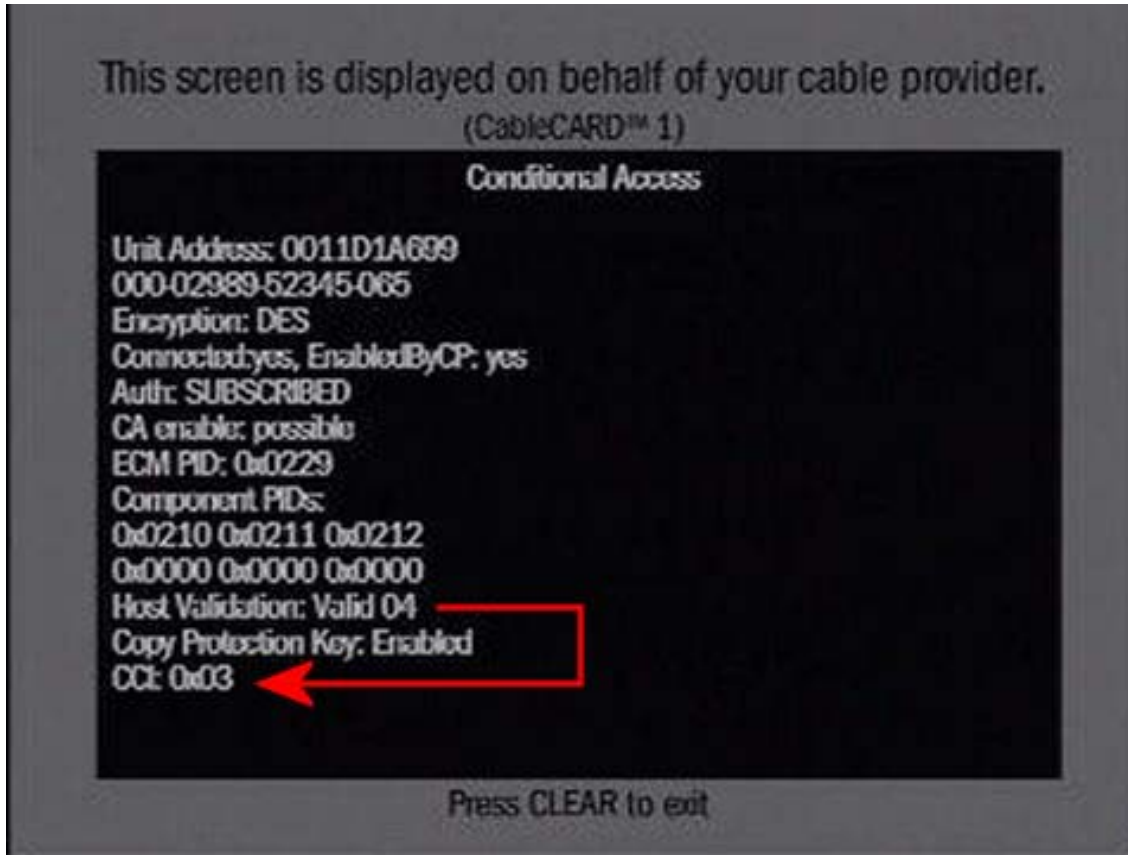

The Conditional Access screen displays **Host Validation: Valid XX** (Valid 04, in this example) when the CableCARD is paired (bound) with the slot in which it is installed.

Note: A CableCARD that is activated but not paired can display encrypted channels, but not copy protected channels.

The **CCI byte** value gives the level of copy protection on the selected channel. A CCI value greater than 0x00 (such as 0x03 shown in this example) means the channel is copy protected.

If you find an issue with a CableCARD, you must contact your cable provider to resolve it.

To display the Conditional Access screen: From TiVo Central select Messages & Settings > Account & System Information > CableCARD Decoders > Configure CableCARD 1 (or 2) > CableCARD menu > **Conditional Access**.