


SA S-Card: Checking binding and copy protection

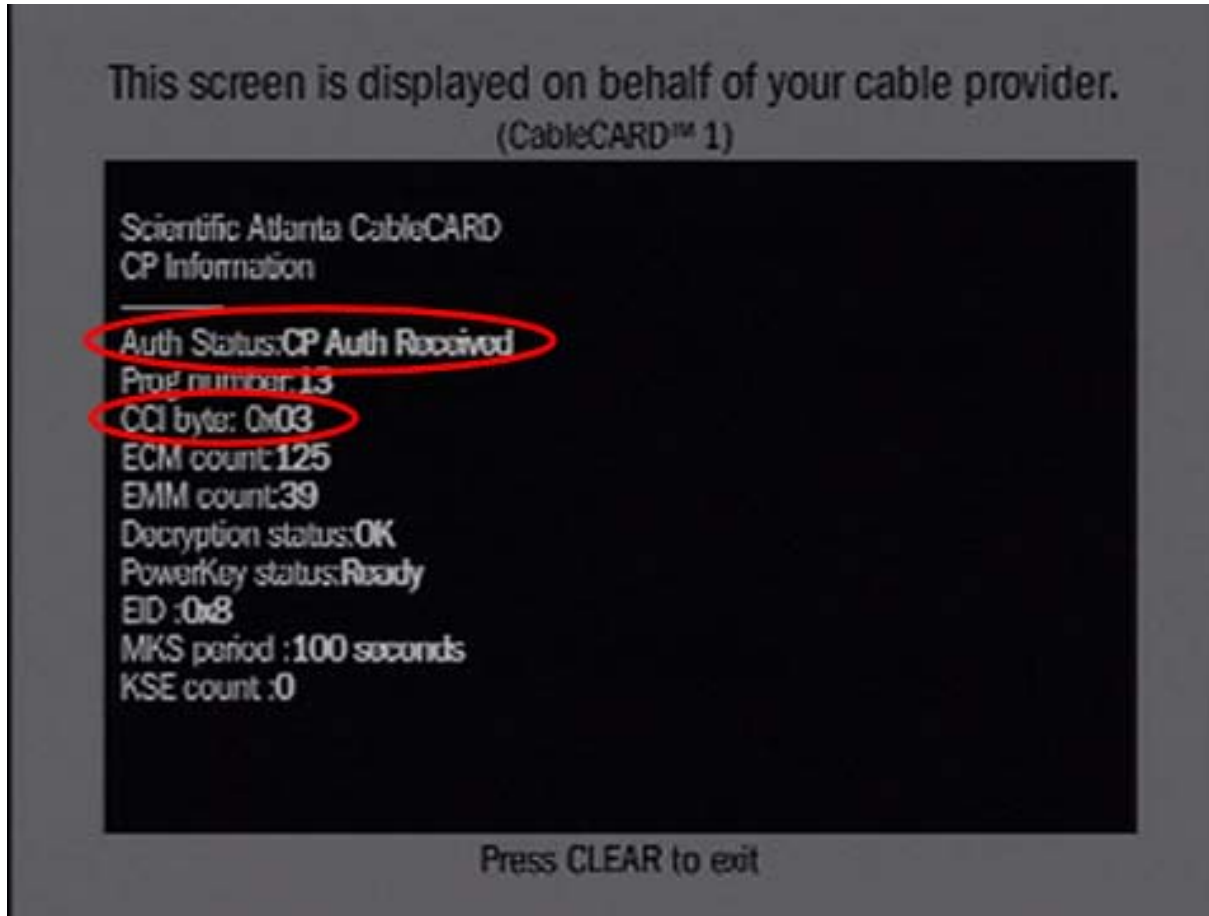

To display this screen, from TiVo Central select Messages & Settings> Account & System Information > CableCARD Decoders > Configure CableCARD 1 (or 2) > CableCARD menu > **SA CableCARD CP Screen**.

The CP Information screen displays **Auth Status: CP Auth Received** when the CableCARD is bound (paired) with the slot in which it is installed.

Note: A CableCARD that is not bound can still display encrypted channels – just not copy protected channels.

The **CCI byte** value gives the level of copy protection on the selected channel. A CCI value greater than 0x00 (such as 0x03 shown in this example) means the channel is copy protected.

If you find an issue with a CableCARD, you must contact your cable provider to resolve it.